


RT5-HO LED FIXTURE



DRAWINGS

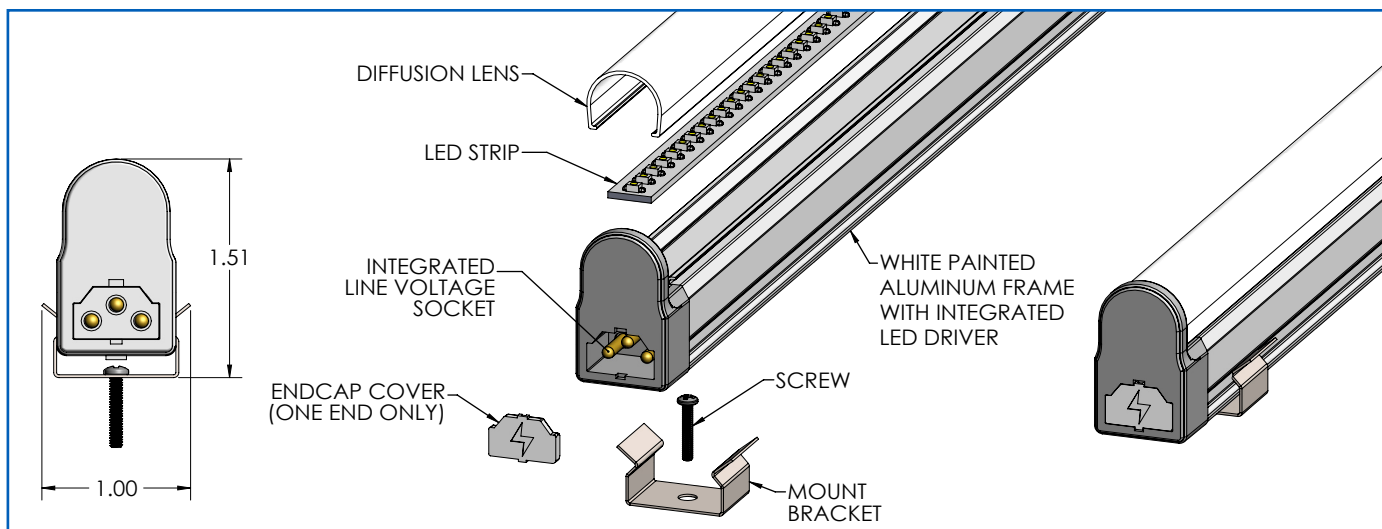

SPECIFICATIONS

Nominal LENGTH	11"	22"	34"	46"	58"
ACTUAL LENGTH	11.0"	21.3"	33.1"	44.3"	56.7"
Output Wattage (W)	6.2W	11.5W	15W	18W	23.5W
Output Lumens (lm)	680	1235	1800	2298	2777
Output Max # Fixtures	20	20	20	20	20
Diode Efficacy (lm/W)	100-120				
Module Outside Dims (W x H)	.80" x 1.36"				
Color Temps (K)	3000K, 4100K, 6000K				
Certifications	UL				
LED Beam Angle	120°				
Module Input Voltage	120 VAC, 60Hz				
Mounting Method	Bracket, Magnet				
Wiring Specs	18AWG X 3C SVT VW-1				
Connector Specs	Friction Quick Disconnect				

FEATURES

- Low profile - Less than 1 3/8" fixture height
- Nominal sizes: 11", 22", 34", 46", 58"
- Aluminum extruded frame
- Integrated Low Voltage Power Supply
- Excellent color rendering
- Easy LED retrofit option for T5 Fluorescent
- Protective diffusion lens
- Easy installation
- Modular connector system

ORDERING INFORMATION

FIXTURE ORDERING INFORMATION						
RT5HO	-	LED	22	-	60	FR
Model		LED Fixture	Normal Length		Lamp (Kelvin)	Lens & Lamp Type
RT5HO		LED	11" 22" 34" 46" 58"		30= 3000 41= 4100 60= 6000	FR= Frost Lens
					2= Normal Output	Consult factory for options


Example: RT5HO-LED22-64FR-2-000

POWER/CONNECTOR CORD ORDERING INFORMATION						
MT5	-	CC	-	N	U	-
Model		Cord Type		Connector Type	Connector Orientation	Cord Length
MT5		CC= Connector Cord PC=Power Cord		N=Ninety Degree S=Straight	U=Up D=Down S=Straight	003=3" 006=6" 012=12" 024=24" 036=36" 048=48" 072=72" 096=96" 120=120" 144=144"
					003= 3 cond	Blank= None SW= Inline Switch Consult factory for options


Example: MT5-CC-NU-012-003

CONNECTOR CORD OPTIONS


STRAIGHT CONNECTOR

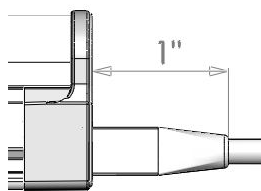


90 DEGREE **DOWN** CONNECTOR



90 DEGREE **UP** CONNECTOR




SAMPLE APPLICATION LAYOUTS

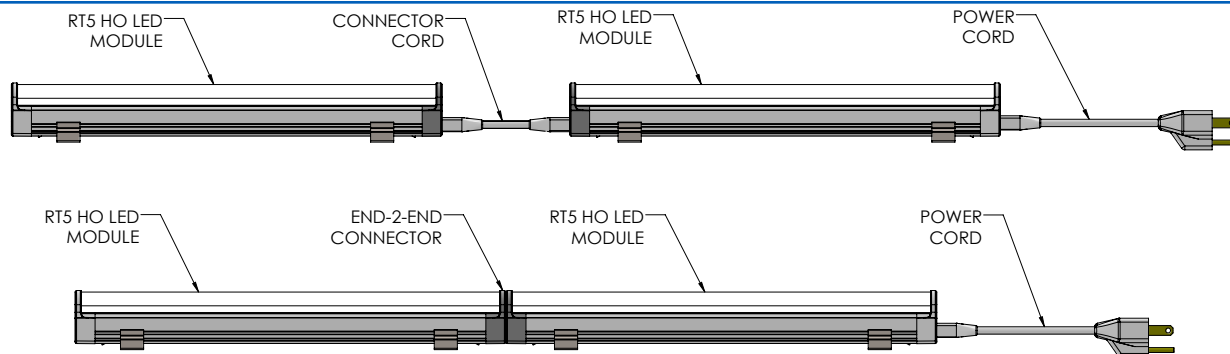

MOUNTING OPTIONS


Standard Mount (MT5-MC-000)

(1) Standard Bracket, (1) Screw

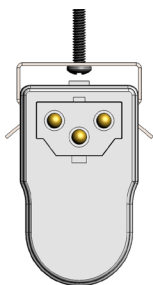


90° Elbow Mount (MT5-MC-001)

(1) 90° Elbow, (1) Standard Bracket, (1) Screw




90° Elbow Mount with Magnet (MT5-MC-002)

(1) 90° Elbow, (1) Standard Bracket, (1) Magnet




Standard Mount with Magnet (MT5-MC-003)

(1) Standard Bracket, (1) Magnet



Note: A standard fixture includes (2) MT5-MC000 brackets, (2) screws and (1) End-2-End connector (MTS-EC-E2EC)

RELATED ACCESSORIES

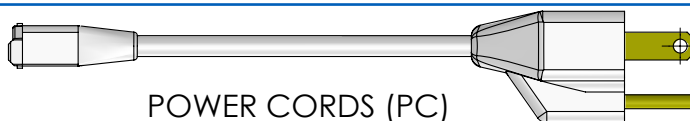

POWER CORDS (PC)



CONNECTOR CORDS (CC)

Length	3"	6"	12"	24"	36"	48"	72"	96"	120"	144"
PC	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
CC	YES	YES	YES	YES	YES	YES	YES	YES	-	-

Note: In-Line switch option available on 96" power cord

RT5-HO LED FIXTURE